

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
18 March 2004 (18.03.2004)

PCT

(10) International Publication Number  
**WO 2004/021909 A1**

(51) International Patent Classification<sup>7</sup>: **A61B 19/00, B25J 18/00, 9/00**

(21) International Application Number:  
PCT/GB2003/003354

(22) International Filing Date: 1 August 2003 (01.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0220460.0 3 September 2002 (03.09.2002) GB

(71) Applicant (for all designated States except US): **THE AC-ROBOT COMPANY LIMITED** [GB/GB]; Imperial College of Science, Technology & Medicine, Department of Mechanical Engineering Mechatronics in Medicine Group, Exhibition Road, London SW7 2BX (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DENT, Alastair** [GB/GB]; 225 Banbury Road, Oxford OX2 7HQ (GB).


(74) Agents: **MAGGS, Michael, Norman et al.; Kilburn & Sirode**, 20 Red Lion Street, London WC1R 4PJ (GB).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: **ROBOT HEAD COMPRISING SPINDLE DRIVE**

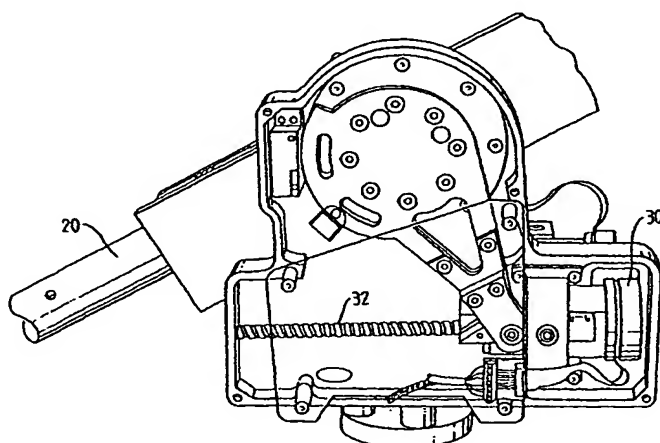

(57) **Abstract:** A robot head, for example for use in surgery, provides a back-drivable system allowing a surgeon to closely control the position of a cutter or other tool. The cutter is mounted at the end of a telescopic arm (20) which can be rotated about two independent perpendicular axes. Rotation about each axis is controlled by a separate motor (30') which turns a lead screw (32). A bearing (34) travels along the lead screw and changes the angle of an offset crank (36) to cause the required rotation about the axis. The current rotational position about each axis is determined by a sensor at the output. A second sensor independently determines the position of the corresponding motor (30) and the two measured positions are compared. If they differ, the power to the cutter is immediately switched off.

WO 2004/021909 A1